




SEI-PAP PRINT 100 FM

product structure

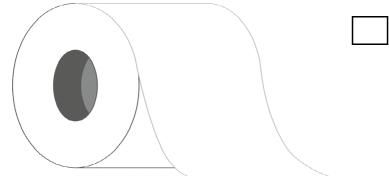

coated paper

silk surface

product information

total weight thickness

100g/sqm 83µ

- Both sides silk coated paper
- tearable
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- excellent printable in all known print methods using standard paper inks
- dimensionstable
- ideal die cutting possibility
- optimal flat lay

Storage in original packaging at 18-25°C and at 40-60% relative humidity