




## **SEI-TAG 12782G**

## product structure

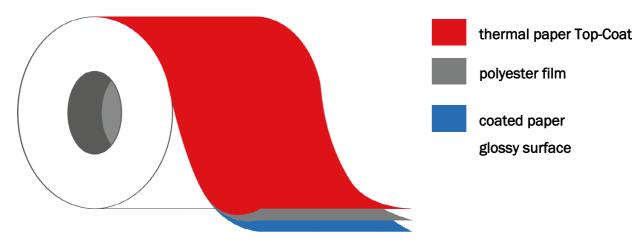

## product information

 $\begin{array}{ll} \text{total weight} & 210\text{g/sqm} \\ \text{thickness} & 185\mu \end{array}$ 

- tear resistant
- processable like paper (e.g. die cutting)
- optimal printable in all known print methods
- printing inks suitable for thermal paper printing required
- · high sensitivity und resistance
- suitable for thermal transfer printing on back side

Storage in original packaging at 18-25°C and at 40-60% relative humidity. Protection against direct sun light, light sources with high UV-share, plasticizers and solvents with alcohol, ester and similar parts.