




SEI-PAP PRINT 200 FM

product structure

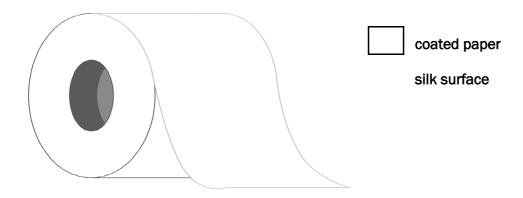

product information

 $\begin{array}{ll} \text{total weight} & 200\text{g/sqm} \\ \text{thickness} & 185\mu \end{array}$

- · Both sides silk coated paper
- tearable
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- · excellent printable in all known print methods using standard paper inks
- dimensionstable
- ideal die cutting possibility
- · optimal flat lay

Storage in original packaging at 18-25°C and at 40-60% relative humidity

SEIBERT-PFV