




## SEI-PAP PRINT 350 FG

## product structure

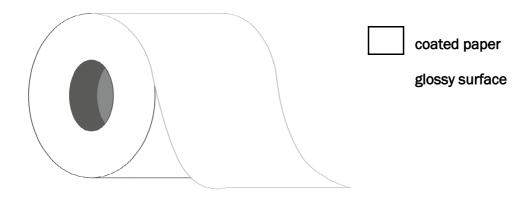

## product information

 $\begin{array}{ll} \text{total weight} & 350 \text{g/sqm} \\ \text{thickness} & 277 \mu \end{array}$ 

- · Both sides glossy coated paper
- tearable
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- excellent printable in all known print methods using standard paper inks
- dimensionstable
- · ideal die cutting possibility
- · optimal flat lay

Storage in original packaging at 18-25 °C and at 40-60% relative humidity