




SEI-TAG 90000w

product structure

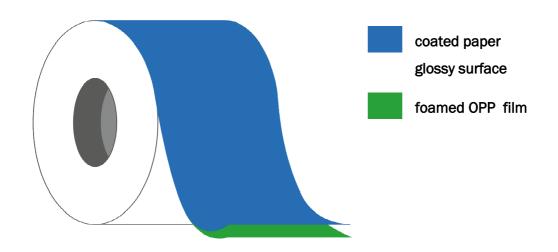

product information

 $\begin{array}{ll} \text{total weight} & \text{155g/sqm} \\ \text{thickness} & \text{195} \mu \end{array}$

- tear resistant
- processable like paper (e.g. die cutting)
- optimal printable in all known print methods
- no special printing inks required for the paper side
- suitable for thermal-transfer printing on front side

Storage in original packaging at 18-25°C and at 40-60% relative humidity

SEIBERT-PFV