




SEI-FILM PRINT P 100FL

product structure

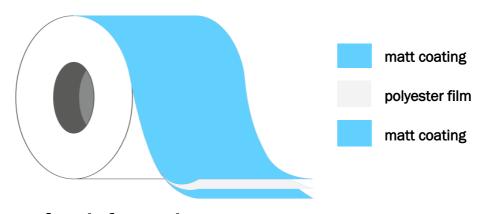

product information

 $\begin{array}{ll} \text{total weight} & \text{160g/sqm} \\ \text{thickness} & \text{125}\mu \end{array}$

- White opaque polyester film both sides matt coated
- temperature resistant and dimensionally stable
- tear resistant and individually writable
- printable in toner based digital print systems
- optimal printable with thermal-transfer print method (resin, wax and resin/wax TT ribbons as well)
- printable in all known traditional printing methods
- the special coating enables one to print like on paper

Storage in original packaging at 18-25°C and at 40-60% relative humidity