




SEI-FILM PRINT P 250FL

product structure

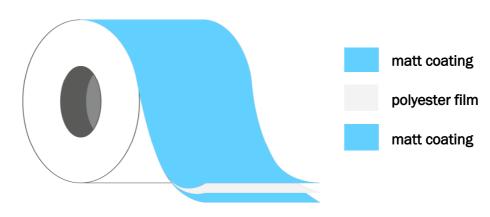

product information

 $\begin{array}{ll} \text{total weight} & 350\text{g/sqm} \\ \text{thickness} & 275\mu \end{array}$

- White opaque polyester film both sides matt coated
- temperature resistant and dimensionally stable
- · tear resistant and individually writable
- printable in toner based digital print systems
- optimal printable with thermal-transfer print method (resin, wax and resin/wax TT ribbons as well)
- printable in all known traditional printing methods
- the special coating enables one to print like on paper

Storage in original packaging at 18-25°C and at 40-60% relative humidity