



SOLUTIONS  
**SOLUTIONS**  
for YOU!



# SEI-FILM PRINT PE 150T

## product structure

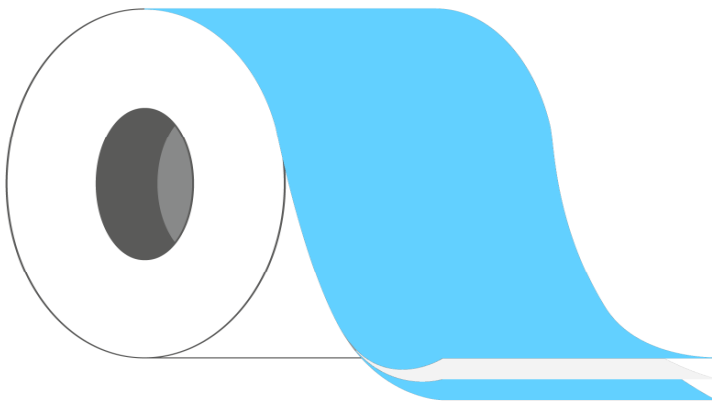

-  matt coating
-  HD Polyethylene film
-  matt coating

## product information

total weight 165g/sqm  
thickness 170 $\mu$

- opaque film based on HDPE both sides matt coated
- tear resistant
- individually writable
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- optimal printable in all known print methods **no laser print**
- the special coating enables one to print like on paper  
use of UV-inks – curing temperature has to be matched with temperature resistance of the film
- improvement of UV-stability and weather resistance is possible due to further UV-stabilisers

Storage in original packaging at 18-25 °C and at 40-60% relative humidity

**SEIBERT-PFV**

Auf den Brechen 55 52372 Kreuzau Telefon/phone +49 2422 902239 [www.seibert-pfv.de](http://www.seibert-pfv.de) [info@seibert-pfv.de](mailto:info@seibert-pfv.de)