


SOLUTIONS
SOLUTIONS
for YOU!



SEI-FILM PRINT PE 200T

product structure

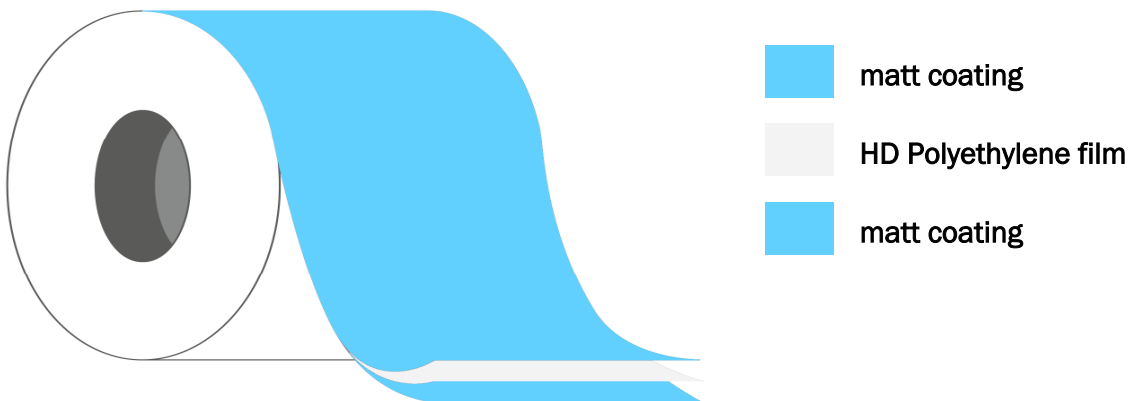

product information

total weight 220g/sqm
thickness 215 μ

- opaque film based on HDPE both sides matt coated
- tear resistant
- individually writable
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- optimal printable in all known print methods **no laser print**
- the special coating enables one to print like on paper
use of UV-inks – curing temperature has to be matched with temperature resistance of the film
- improvement of UV-stability and weather resistance is possible due to further UV-stabilisers

Storage in original packaging at 18-25°C and at 40-60% relative humidity

SEIBERT-PFV

Auf den Brechen 55 52372 Kreuzau Telefon/phone +49 2422 902239 www.seibert-pfv.de info@seibert-pfv.de