




## SEI-FILM PRINT PP 150 Eco

## product structure

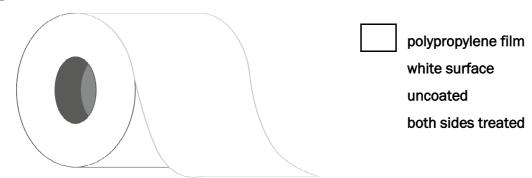

## product information

 $\begin{array}{ll} \text{total weight} & \text{106g/sqm} \\ \text{thickness} & \text{150} \mu \end{array}$ 

- white opaque film based on PP
- non tearable
- dimensionally stable & resistant against moisture
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- optimal printable in all known print methods no laser print
- special printing inks for films usable for not absorbing surface required use of UV-inks – curing temperature has to be matched with temperature resistance of the film
- improvement of UV-stability and weather resistance is possible due to further UV-stabilisers

Storage in original packaging at 18-25°C and at 40-60% relative humidity