




## SEI-FILM PRINT PP 330 Eco

## product structure

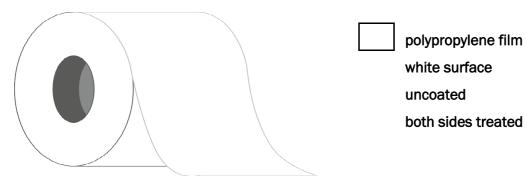

## product information

total weight 231g/sqm thickness 330µ

- white opaque film based on PP
- non tearable
- dimensionally stable & resistant against moisture
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- optimal printable in all known print methods no laser print
- special printing inks for films usable for not absorbing surface required use of UV-inks curing temperature has to be matched with temperature resistance of the film
- improvement of UV-stability and weather resistance is possible due to further UV-stabilisers

Storage in original packaging at 18-25°C and at 40-60% relative humidity

## **SEIBERT-PFV**