




## **SEI-FILM PRINT PP 400T**

## product structure

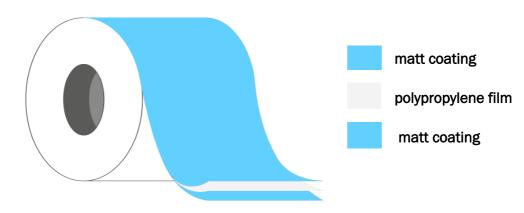

## product information

 $\begin{array}{ll} \text{total weight} & 270 \text{g/sqm} \\ \text{thickness} & 390 \mu \end{array}$ 

- White opaque polypropylene film both sides matt coated
- tear resistant
- individually writable
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- excellent printable in all known print methods no laser print
- approved for use in HP Indigo
- the special coating enables one to print like on paper use of UV-inks curing temperature has to be matched with temperature resistance of the film

Storage in original packaging at 18-25°C and at 40-60% relative humidity