




SEI-FILM PRINT PP 95 Eco

product structure

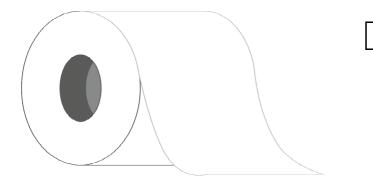

polypropylene film white surface uncoated both sides treated

product information

total weight thickness

69g/sqm 95µ

- white opaque film based on PP
- non tearable
- dimensionally stable & resistant against moisture
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- optimal printable in all known print methods no laser print
- special printing inks for films usable for not absorbing surface required use of UV-inks – curing temperature has to be matched with temperature resistance of the film
- improvement of UV-stability and weather resistance is possible due to further UV-stabilisers

Storage in original packaging at 18-25°C and at 40-60% relative humidity