


*SOLUTIONS*  
**SOLUTIONS**  
*for YOU!*



# SEI-TAG 99212DT

## product structure

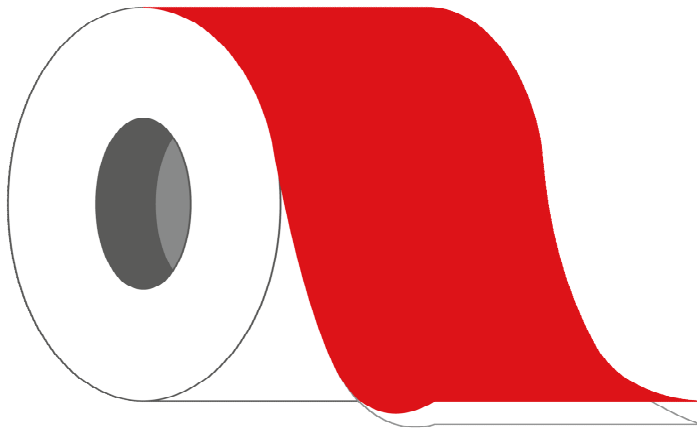

-  thermal film top coat
-  Hard vinyl film  
matt surface

## product information

total weight            215g/sqm  
thickness                220μ

- Tear resistant
- Thermal film is printable in all known print methods while using inks for thermal films
- high sensitivity und resistance
- Hard vinyl film is excellent printable in all know print methods while using special film inks suitable for not absorbing surfaces  
use of UV-inks – curing temperature has to be matched with temperature resistance of the film
- Hard vinyl film is suitable for thermal transfer printing (resin, wax and wax/resin TT ribbons as well)

Storage in original packaging at 18-25 °C and at 40-60% relative humidity.

**SEIBERT-PFV**

Auf den Brechen 55 52372 Kreuzau Telefon/phone +49 2422 902239 [www.seibert-pfv.de](http://www.seibert-pfv.de) [info@seibert-pfv.de](mailto:info@seibert-pfv.de)