


*SOLUTIONS*  
**SOLUTIONS**  
*for YOU!*



## SEI-FILM PRINT PP 330T

### product structure

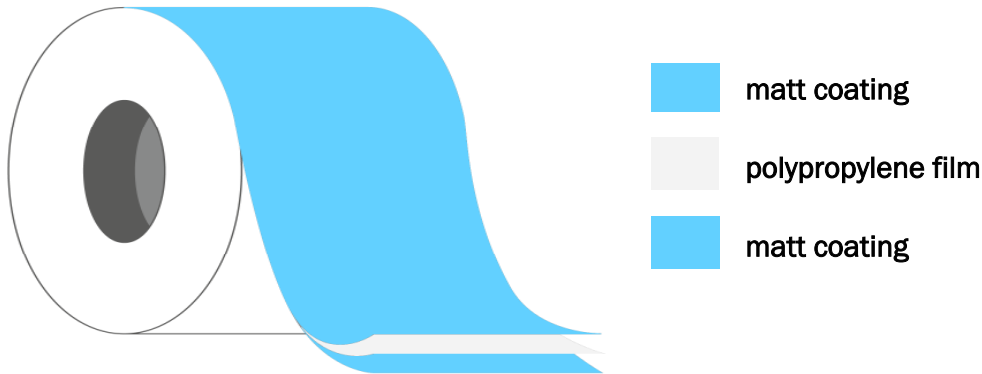

### product information

total weight            220g/sqm  
thickness                330μ

- White opaque polypropylene film both sides matt coated
- tear resistant
- individually writable
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- excellent printable in all known print methods - **no laser print**
- approved for use in HP Indigo
- the special coating enables one to print like on paper  
use of UV-inks – curing temperature has to be matched with temperature resistance of the film

Storage in original packaging at 18-25 °C and at 40-60% relative humidity

**SEIBERT-PFV**

Auf den Brechen 55 52372 Kreuzau Telefon/phone +49 2422 902239 [www.seibert-pfv.de](http://www.seibert-pfv.de) [info@seibert-pfv.de](mailto:info@seibert-pfv.de)