


## SEI-FILM PRINT PP 430 Eco

### product structure

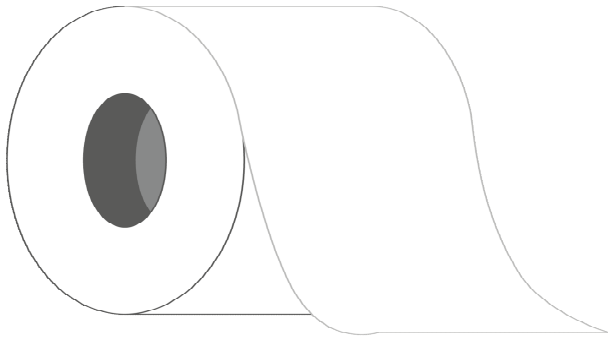

- polypropylene film
- white surface
- uncoated
- both sides treated

### product information

total weight	305g/sqm
thickness	430μ

- white opaque film based on PP
- non tearable
- dimensionally stable & resistant against moisture
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- optimal printable in all known print methods **no laser print**
- special printing inks for films usable for not absorbing surface required  
use of UV-inks – curing temperature has to be matched with temperature resistance of the film
- improvement of UV-stability and weather resistance is possible due to further UV-stabilisers

Storage in original packaging at 18-25 °C and at 40-60% relative humidity