


SEI-FILM PRINT P XXXFL

product structure

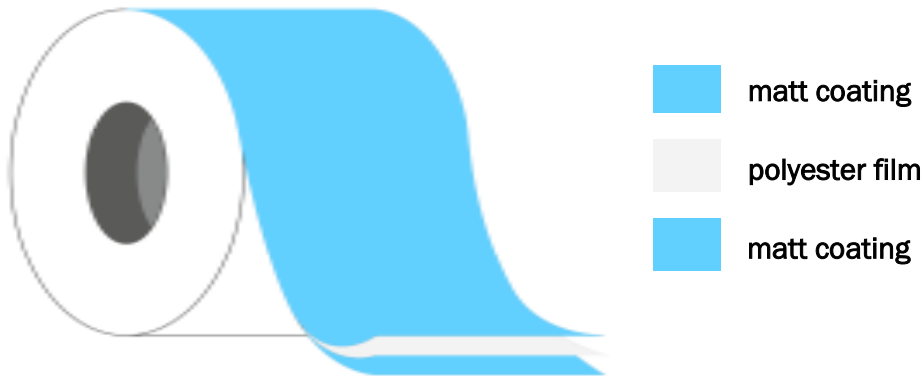

product information

Quality	P 100FL	P 125FL	P 175FL	P 250FL
total weight	160 g/sqm	200 g/sqm	270 g/sqm	350 g/sqm
thickness	125 μ	155 μ	200 μ	275 μ

- White opaque polyester film both sides matt coated
- temperature resistant and dimensionally stable
- tear resistant and individually writable
- printable in toner based digital print systems
- optimal printable with thermal-transfer print method (resin, wax and resin/wax TT ribbons as well)
- printable in all known traditional printing methods
- the special coating enables one to print like on paper

Storage in original packaging at 18-25 °C and at 40-60% relative humidity