


SEI-FILM PRINT PVC XXXT

product structure

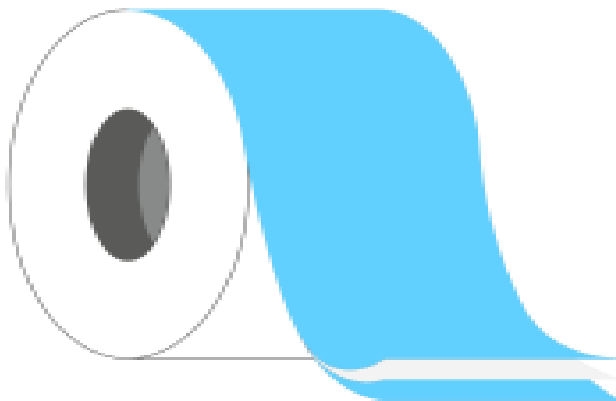

product information

Quality	PVC 200T	PVC 250T
total weight	280 g/sqm	345 g/sqm
thickness	215 μ	265 μ

Other thicknesses available on request

- opaque film based on hard vinyl both sides matt coated
- tear resistant
- individually writable
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- optimal printable in all known print methods **no laser print**
- the special coating enables one to print like on paper
use of UV-inks – curing temperature has to be matched with temperature resistance of the film
- improvement of UV-stability and weather resistance is possible due to further UV-stabilisers

Storage in original packaging at 18-25 °C and at 40-60% relative humidity