


*SOLUTIONS  
SOLUTIONS  
for YOU!*



# SEI-TAG 99750DT

## product structure

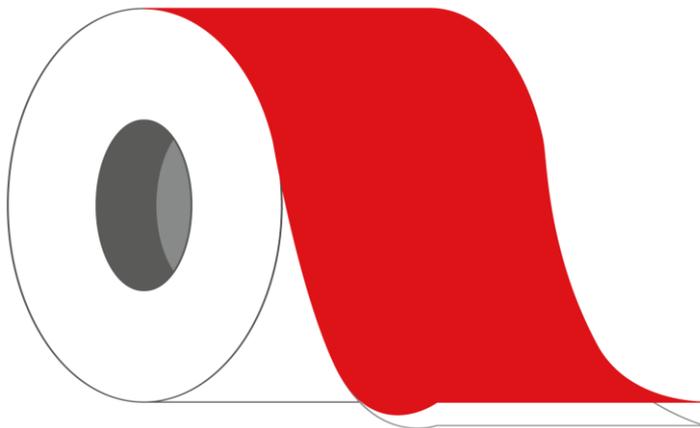

-  thermal film top coat
-  HD polyethylene film  
paperlike surface

## product information

total weight 115g/sqm  
thickness 125 $\mu$

- Tear resistant
- Thermal film is printable in all known print methods while using inks for thermal films
- high sensitivity und resistance
- HD polyethylene film is excellent printable in all know print methods while using special printing inks for films suitable for not absorbing surface required  
use of UV-inks – curing temperature has to be matched with temperature resistance of the film
- HD polyethylene film is suitable for thermal transfer printing (resin, wax and wax/resin TT ribbons as well)

Storage in original packaging at 18-25°C and at 40-60% relative humidity.

**SEIBERT-PFV**

Bergkamp 12 52393 Hürtgenwald T: 0049 2429 9599916 W: [www.seibert-pfv.de](http://www.seibert-pfv.de) E: [info@seibert-pfv.de](mailto:info@seibert-pfv.de)