SEI-PAP PRINT glossy

Product structure

☐ coated paper

glossy surface
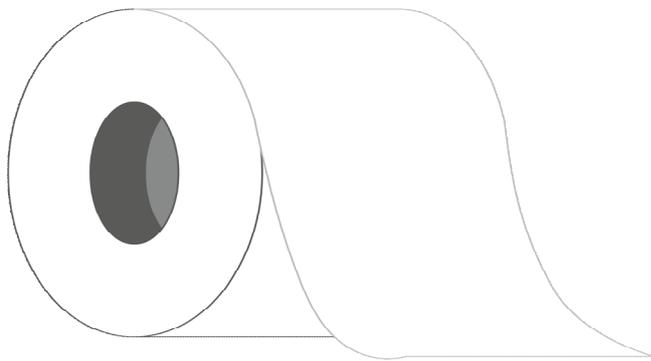
Product information

Quality	100FG	150FG	200FG	250FG	350FG
total weight	100 g/m²	150 g/m²	200 g/m²	250 g/m²	350 g/m²
thickness	74 µ	112 µ	150 µ	184 µ	277 µ

- Both sides glossy coated paper
- tearable
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- excellent printable in all known print methods using standard paper inks
- dimensionstable
- ideal die cutting possibility
- optimal flat lay

Storage in original packaging at 18-25°C and at 40-60% relative humidity