


SEI-PAP PRINT matt/satin

product structure

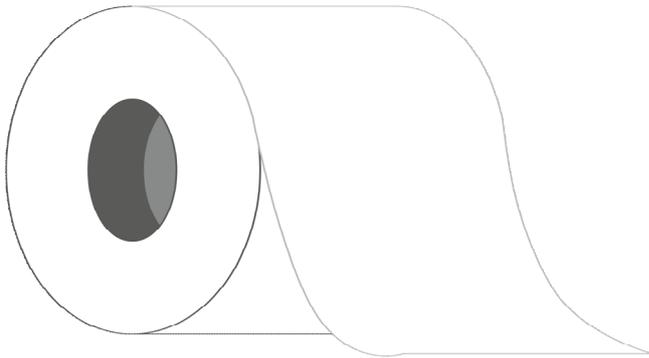

product information

Quality	100FM	150FM	200FM	250FM	350FM
Total weight	100g/sqm	150g/sqm	200g/sqm	250g/sqm	350g/sqm
Thickness	83µ	130µ	185µ	232µ	350µ

- Both sides silk coated paper
- tearable
- optimal printable with thermal-transfer print method (resin, wax and wax/resin TT ribbons as well)
- excellent printable in all known print methods using standard paper inks
- dimensionstable
- ideal die cutting possibility
- optimal flat lay

Storage in original packaging at 18-25° C and at 40-60% relative humidity